



GTS-65

Girth-weld protection of elevated operating temperature pipelines

Canusa-CPS is a leading manufacturer of specialty pipeline coatings which, for over 35 years, have been used for sealing and corrosion protection of pipeline joints and other substrates. Canusa high performance products are manufactured to the highest quality standards and are available in a number of configurations to accommodate your specific project applications.

Product Description

The GTS-65 system provides superior corrosion protection and excellent bonding on pipelines operating up to 65°C. GTS-65 has been designed with a unique adhesive technology that remains "open" longer than traditional adhesives. Also, special surface active agents allow bonding to lower surface energy coatings (such as polypropylene). As a result, lower preheat temperatures are required to attain true adhesive wet-out and superior bonding to PE, PP and FBE surfaces is achieved.

Features & Benefits


Superior Force Cured Epoxy Method

Canusa's proven method of force curing the epoxy primer to the steel allows the installer to "pre-inspect" the joint prior to sleeve application. The epoxy will not be displaced during the aligning and shrinking stages of the sleeve installation. This provides the assurance that the pipe is fully protected. Canusa's epoxy primer can be applied to an even, nominal 150µm (6 mil) thickness for maximum corrosion protection.

Unique Adhesive Technology

Canusa's unique adhesive technology allows for lower installation pre-heat temperatures and superior bonding to PE, PP and FBE coatings. The adhesive has been formulated to bond directly to the main line coating; epoxy is applied to the steel only. The result is a superior bond to the substrate, easier application and significant cost savings.

CANUSA-CPS is registered to ISO 9001:2008.

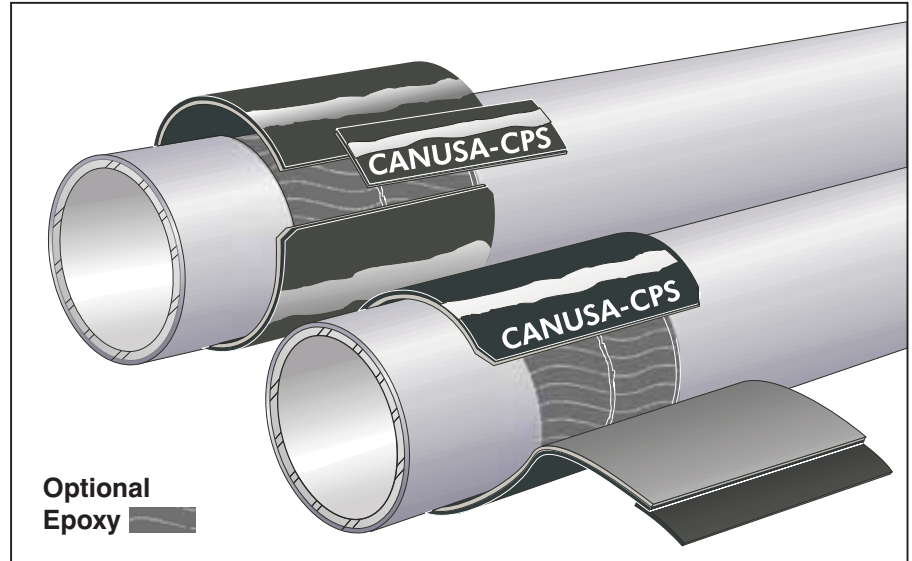

Optional Epoxy

Flexible Installation.

GTS-65 can be used as a 2-layer or 3-layer sleeve system at the same low pre-heat temperature. For added flexibility, CanusaWrap bulk rolls are also available. Consult your Canusa representative to review your specific project requirements.

Long Term Corrosion Protection.

GTS-65 Sleeves provide superior corrosion protection because of the high performance system approach. This combination provides a protective coating with the structural integrity of a seamless tube, providing excellent resistance to cathodic disbondment and excellent durability against abrasion and chemical attack. The result is effective, long term protection against corrosion.

Saves Time & Money.

Time is saved in three ways; lower pre-heat means less time heating; epoxy on the steel only, means less time applying the epoxy; and the pre-attached closure means less time handling, positioning and installing the sleeve. The overall system minimizes installation time and labour costs while promoting high production rates.

Applications



Oil & Gas



Offshore Pipelines



Polypropylene

Configurations



Wrapid Sleeve™



CanusaWrap™



2-Layer



3-Layer

Pipe Sizes



55-3048 (2"-120")

Temperature Range



Up to 65°C (149°F)

Approvals



EN 12068, SNAM, Gazprom, TransCanada, Gaz de France

Product Selection Guide

Choose your sleeve based on Operating Temperature and Characteristics listed below.

Sleeve Operating Characteristics	Celsius	Fahrenheit	GTS-65
	200°	392°	
	175°	347°	
	125°	257°	
	100°	212°	
	75°	167°	
	50°	122°	
	Pipeline Operating Temp.	°C (°F)	65 (150)
	Minimum Installation Temp.	°C (°F)	90 (195)
	Resistance to Circumferential Forces		excellent
Resistance to Soil Stress		excellent	
Resistance to Axial Pipe Movement		excellent	
Main Line Coating Compatibility		FBE, PE, HPPC, PP	

Typical Product Properties

Adhesive	Test Standard	Unit	GTS-65
Softening point	ASTM E28	°C (°F)	94 (201)
Lap shear @ 23°C	EN 12068	N/cm ²	245
Lap Shear @ 60°C	EN 12068	N/cm ²	8
Backing			
Specific gravity	ASTM D792		0.93
Tensile strength	ASTM D638	MPa (psi)	24 (3480)
Elongation	ASTM D638	%	700
Hardness	ASTM D2240	Shore D	50
Abrasion resistance	ASTM D1044	mg	35
Volume Resistivity	ASTM D257	ohm-cm	10 ¹⁷
Dielectric Voltage Brkdw	ASTM D149	kV/mm	27
Sleeve			
Impact	EN 12068	J	>15
Indentation	EN 12068	mm	0.65 (pass)
Peel Adhesion	ASTM D1000	N/cm (pli)	120 (70) **
Peel Adhesion	EN 12068	N/cm	>100 **
Cathodic Disbondment	ASTM G8	mm rad	3
Water Absorption	ASTM D570	%	0.05
Low Temp. Flexibility	ASTM D2671-C	°C (°F)	>-32 (-26)
Fully Recovered T Thickness		mm (mils)	1.9 (77)
Fully Recovered L Thickness		mm (mils)	2.4 (96)
Fully Recovered S Thickness		mm (mils)	3.0 (121)

**force result of backing elongation during peeling due to superior bond strength

Epoxy Primer Information

GTS-65 (3-layer) require epoxy on the cut-back area and 10 mm (0.5") onto the adjacent pipe coating.

Epoxy Primer Kits
This kit includes measured quantities of base resin and cure, a stirring stick, applicator pad or roller and gloves. The kit contains sufficient primer for up to 1 square meter (10 sq. ft) of coverage. For example: 1 kit is sufficient for a 915mm (36") diameter pipe with a 300mm (12") total cutback.

Typical Primer Coverage
Joints per US gallon assuming 300mm (12") total cutback and 150µm (6mils) coating thickness

Pipe diameter	mm	in	joints/ US gallon
170	6.6		130
230	8.6		97
280	10¾		78
315	12¾		70
400	16		60
450	18		55
500	20		43
610	24		35
760	30		28
915	36		23
1060	42		20
1220	48		18
1422	56		15
1525	60		14


Bulk Epoxy Primer
Bulk epoxy components must be ordered separately. The mixing ratio for the E primer is 4 parts base, 1 part cure by volume, and 6.3 parts base, 1 part cure by weight. Pumps are available to facilitate mixing operation. Average coverage for bulk primers is 20 square meters per U.S. gallon, (220 sq. ft / U.S. gallon).

Epoxy Properties

Pot life @ 23°C (73°F) 20 minutes
Typical epoxy coated thickness 100-150µm (4 - 6 mils)
Shelf Life @ 23°C, when properly stored 3 years

How To Order¹:

Dimensions & Ordering Info	Ordering Options - Global Transmission Sleeve		
	T Thickness	L Thickness	S Thickness
	T	L	S
	BK-Black		
	300, 450, 600, 900mm (12", 18", 24", 36")		
	55-500mm (2"-20")	55 - 3048 mm (2" - 120")	
	Canusa "E" Epoxy (Optional)		
	1.1 mm (45 mils)	1.3 mm (50 mils)	1.6 mm (65 mils)
	0.6 mm (25 mils)	0.9 mm (36 mils)	1.1 mm (43 mils)
	GTS-65 - 65°C (149°F)		



Min. Sleeve Width = Bare Steel Dimension + 50 mm (2") on each side of the pipe joint.

The above represent standard Wrapid Sleeve™ ordering options. Consult your Canusa representative for any unique project requirements.

¹ For CanusaWrap™ bulk rolls, consult you Canusa representative. GTS-65 requires CLW closures.



A SHAWCOR COMPANY

Canada

CANUSA-CPS
a division of SHAWCOR LTD.
25 Bethridge Road
Toronto, Ontario
M9W 1M7,
Canada
Tel: +1 (416) 743-7111
Fax: +1 (416) 743-5927

U.S./Latin America

CANUSA-CPS
a division of SHAWCOR INC.
2408 Timberloch Place
Building C-8
The Woodlands, Texas
77380, U.S.A.
Tel: +1 (281) 367-8866
Fax: +1 (281) 367-4304

Europe/Middle East

CANUSA-CPS
a division of Canusa Systems Ltd.
Unit 3, Sterling Park
Gatwick Road
Crawley, West Sussex
England RH10 9QT
Tel: +44 (1293) 541254
Fax: +44 (1293) 541777

Asia/Pacific

CANUSA-CPS
a division of SHAWCOR LTD.
#05-31, Blk 52, Frontier
Ubi Avenue 3
Singapore
408867
Tel: +65-6749-8918
Fax: +65-6749-8919